



sezito®

Tiles | Sanitary | Chemical

Living with art

BOOK MATCH
600X1200MM



sezito®

Tiles | Sanitary | Chemical



Choose your living chunk





Comfort
with
living life



Book Match

SERIES

A vision of tiles was conceptualized and play with the visual interpretation of patterns. Showing a combination of modern shapes created from contrasting colors, the number of pattern combinations are meant to be endless.

PGVT
600X1200MM




AMBOSS PEARL



RANDOM- 01



ARCTIC WHITE

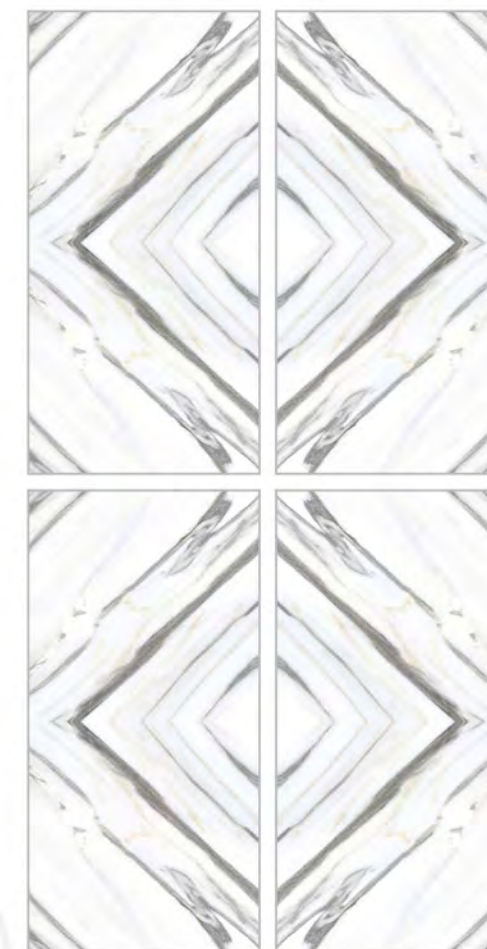

RANDOM- 01



Book Match

SERIES



PGVT 600X1200MM



ARCTIC WHITE



BRICOLA NATURAL



RANDOM- 01



CALACATTA ONDULATO



RANDOM- 02



Book Match

SERIES



PGVT 600X1200MM




CALACATTA ONDULATO



ELITE MARMI



RANDOM- 01

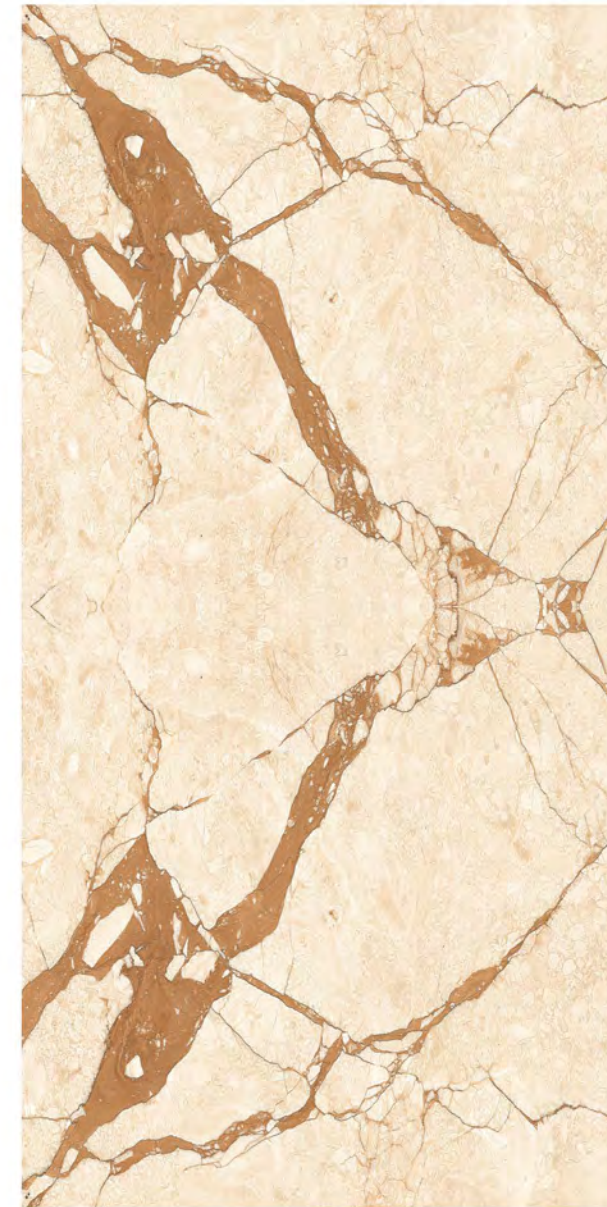

ETHOS NATURAL



RANDOM- 01



Book Match


SERIES




PGVT 600X1200MM




ELITE MARMİ

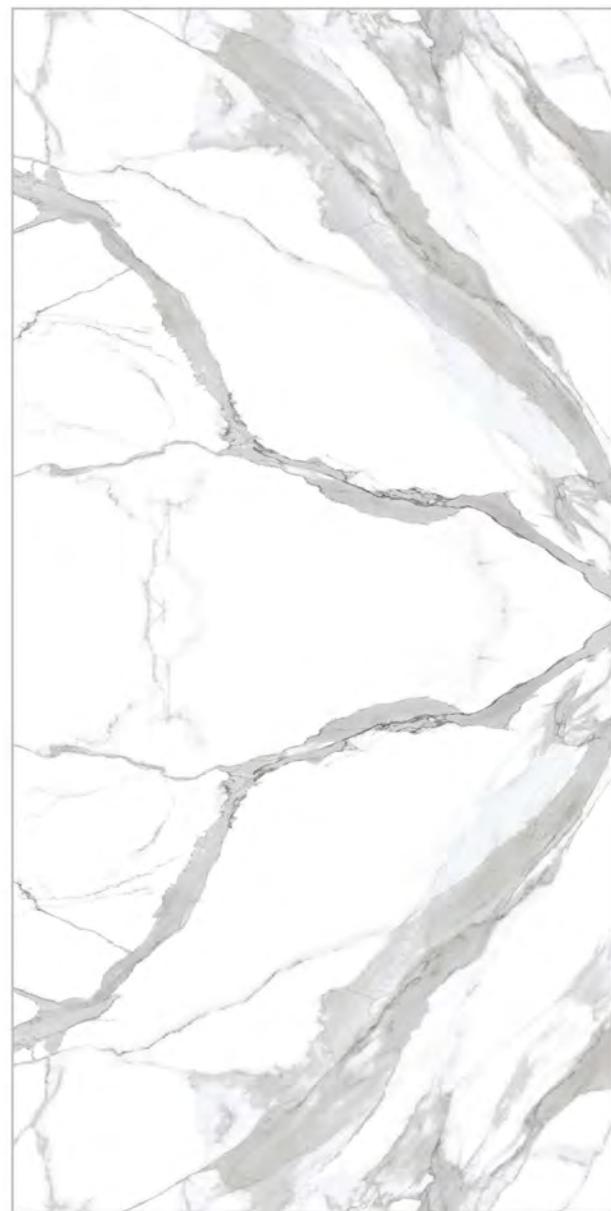

GALAXY STUTUARIO

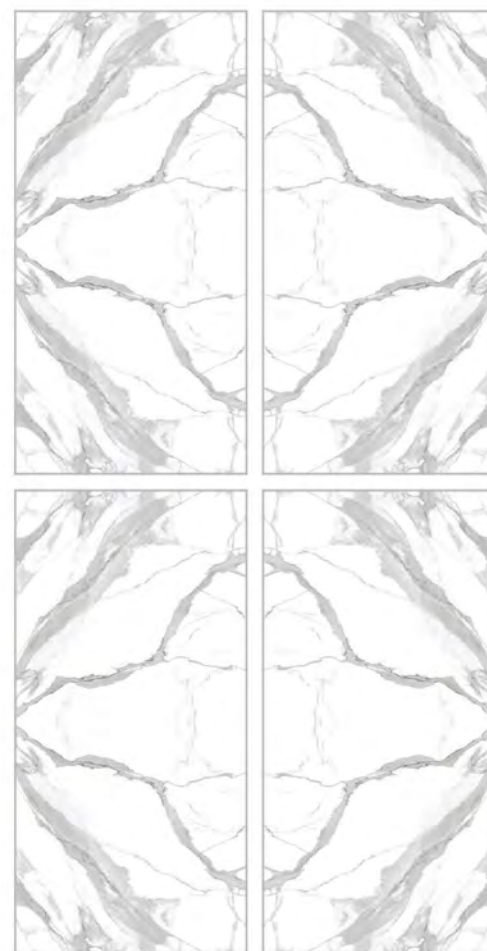


RANDOM- 01

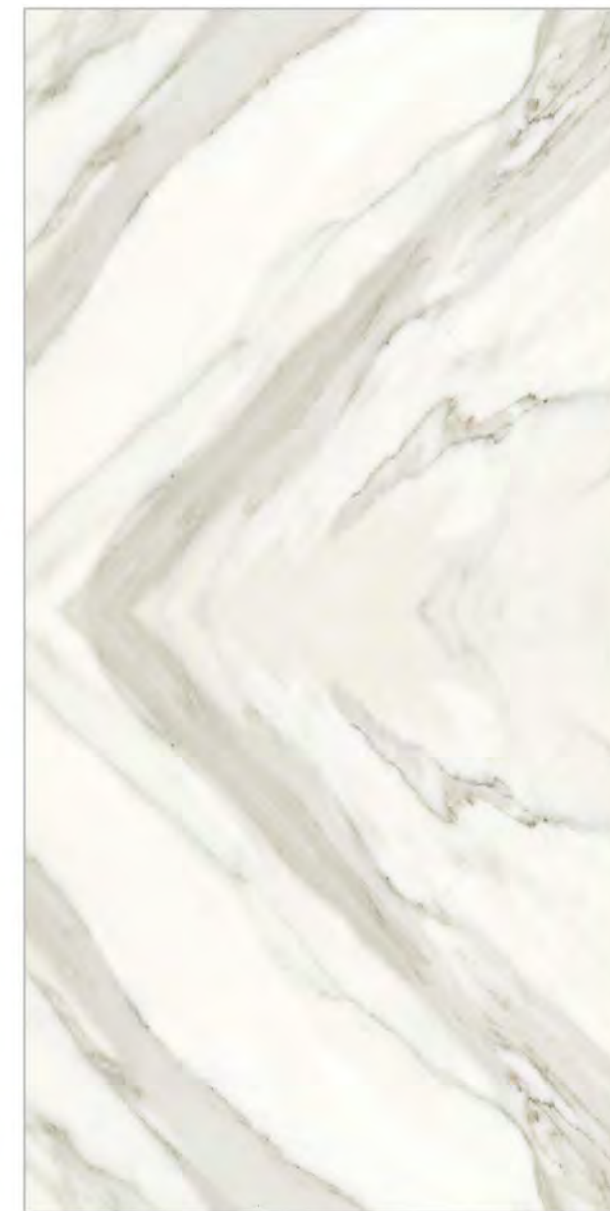

METRIX WHITE



RANDOM- 01

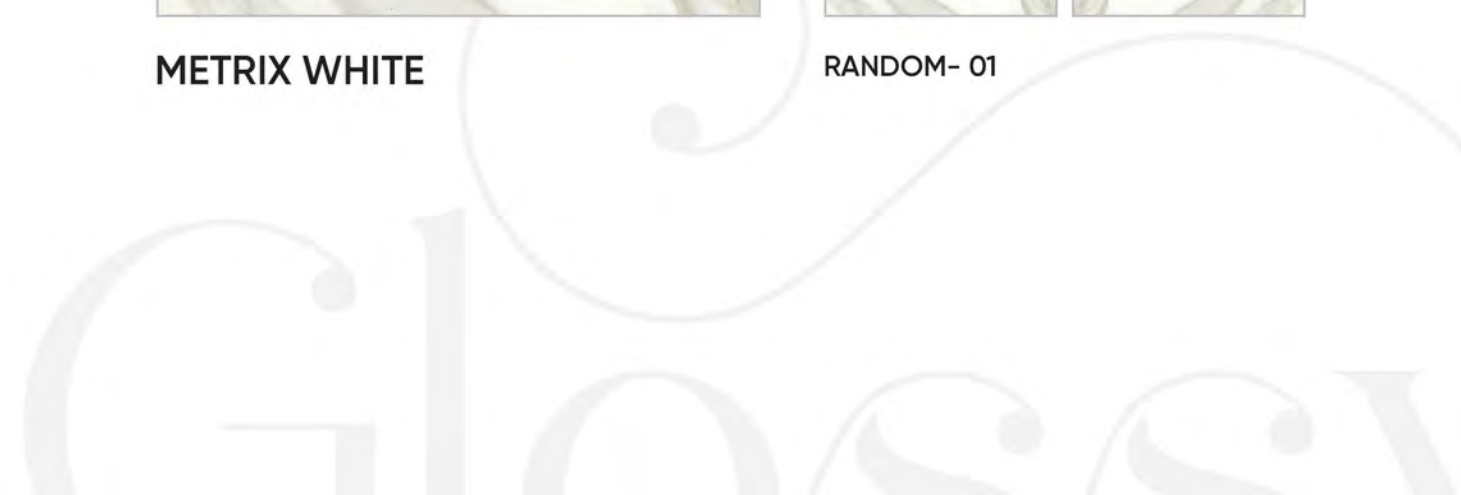

Book Match

SERIES

sezito[®]
Tiles | Sanitary | Chemical


PGVT 600X1200MM



GALAXY STUTUARIO



MILANO SKY

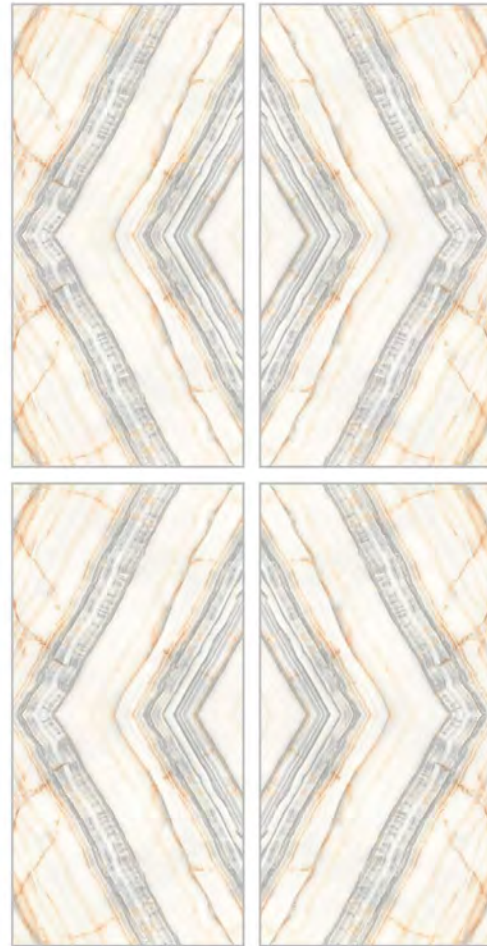

RANDOM-01



NORWAY SEAL



RANDOM-01

Book Match

SERIES



PGVT 600X1200MM



NORWAY SEAL




RAINBO BROWN



RANDOM- 01



SPARKEL WHITE

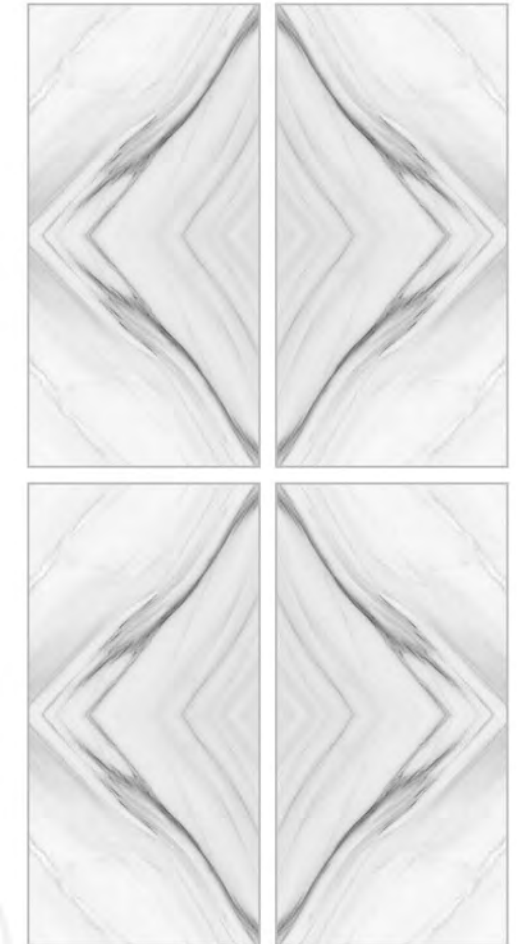

RANDOM- 01



Book Match


SERIES



PGVT 600X1200MM




SPARKEL WHITE

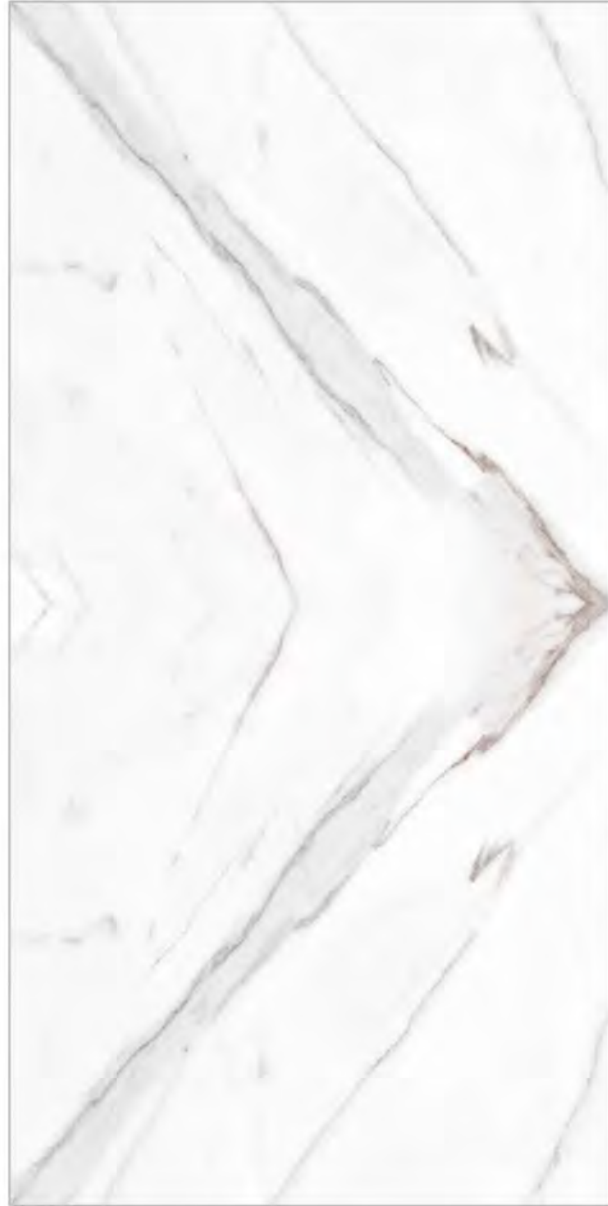

TEXAS WHITE



RANDOM- 01

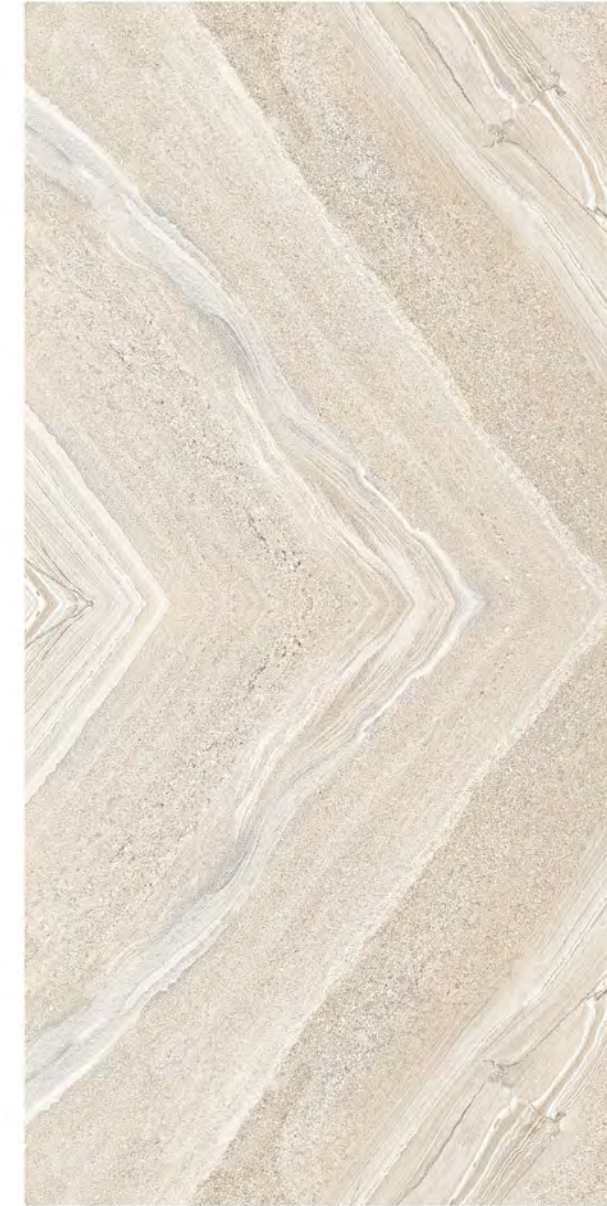

WILLO PRIME



RANDOM- 01



Book Match

SERIES

PGVT 600X1200MM




WILLO PRIME




WILSON CREMA




RANDOM- 01

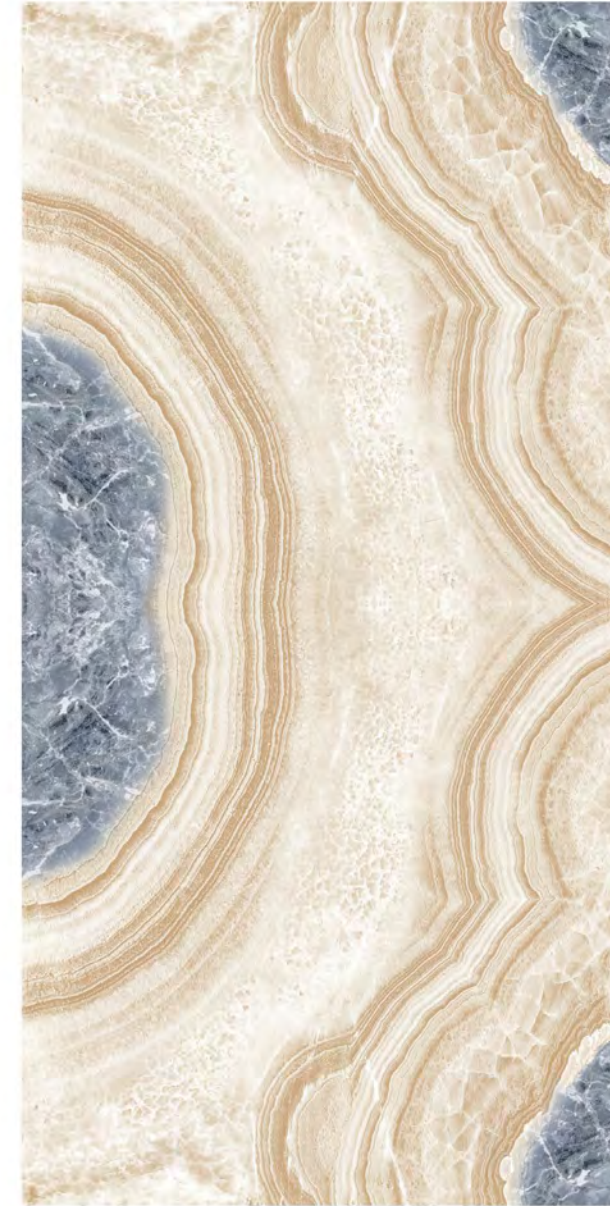

ZEBRANO BLUE

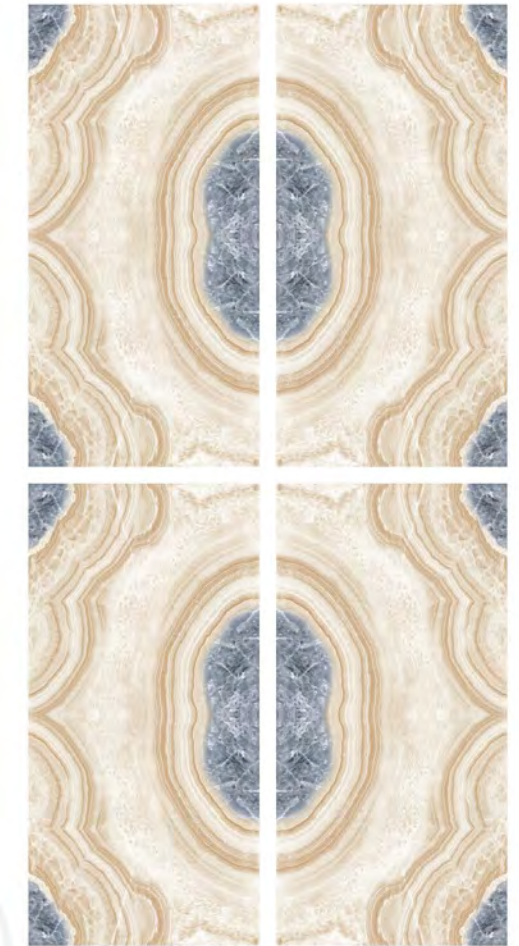

RANDOM- 01

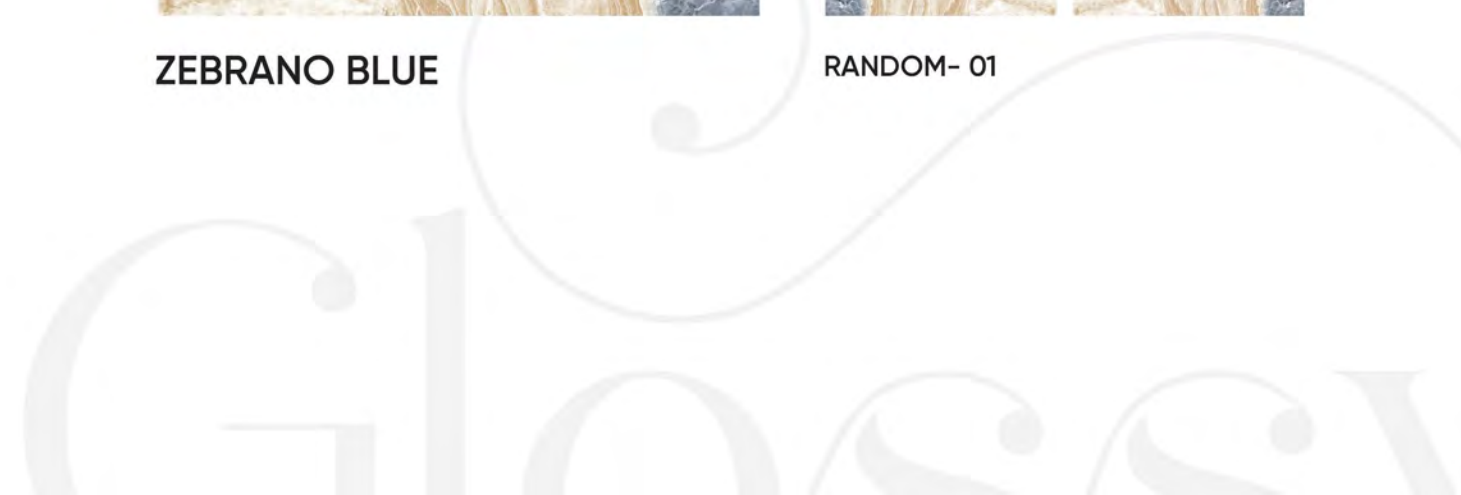

Book Match

SERIES



PGVT 600X1200MM



WILSON CREMA

Technical Specifications.

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP BIa	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF GVT / PGVT	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Breaking strength	Min. 35 N/mm	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Impact resistance	As per mfg	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101
THERMO HYDROMETRIC PROPERTIES				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given o by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

Packing Details.

SR. NO.	PRODUCT	NOMINAL SIZE	TILES PER BOX	COVERAGE AREA	WEIGHT
1	VITRIFIED TILES	600 x 1200 mm	2	1.44 Sq. Mtr.	29 Kg Approx..

Note: •Colour Shown are as accurate as the limitations of the printing process will allow. •Prospective customers are advised to inspect a sample of the tile before ordering. •Every effort has been made to ensure the accuracy of the information given. •However, the company reserve the right to change the specifications without prior notice. •Sometime variations in shade or size being inherent to ceramic industry may occur. •Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

Applications.



DISCLAIMER : We reserves the right to delete & amend either totally of partially, and of the colours, shapes, size, references and other technical specification contain in catalogue at any time. the colours shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample final selection. The details of colours, size, references should be vitrified for Typographical errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLIANT SHALL BE SHALL ENTERTAINED ON TILES ALREADY LAID/FIXED.



sezito[®]

Tiles | Sanitary | Chemical

Contact Number :- +91 93 93 93 39 28

CR INTERNATIONAL ,SHOP NO - 7 , BALAJI COMPLEX
B/H - VISHAL FURNITURE, 8A NATIONAL HIGHWAY,MORBI - 363642

info@sezito.com | www.sezito.com