



sezito®

Tiles | Sanitary | Chemical

GETTING A RELIABLE BRAND FOR ALL YOUR CONSTRUCTION RELATED NEEDS IS OF UTMOST IMPORTANCE. ANY DUPLICATION IN CONSTRUCTION CHEMICALS, EPOXY, ADHESIVES, ADMIXTURES, SEALERS CAN HAVE DAMNING EFFECTS. WHEN IT COMES TO TRUST, LEGADO IS A SYNONYM OF TRUST. WE HAVE INVESTED HEAVILY IN R&D SO THAT YOU HAVE COMPLETE PEACE OF MIND.

NOT A TEMPORARY **BOND.**

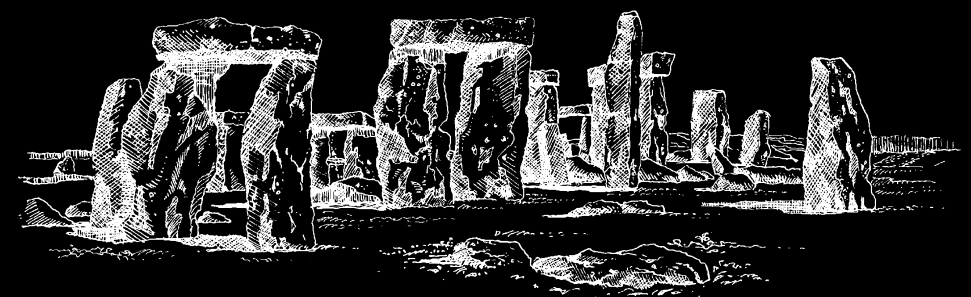




INDEX


PRODUCT RANGE



Adhesives for
all types of tiles &
natural stones




High strength grout
for all types of tiles &
natural stones



Wide range of colors
for Epoxy grouts in
solid and sparkle finishes



Heavy duty
waterproofing for
interior & exterior applications

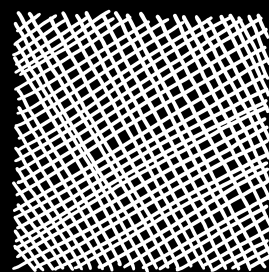

TILE ADHESIVE

| | |
|-------|----|
| TRI | 05 |
| TETRA | 07 |
| PENTA | 09 |
| HEXA | 11 |

GROUT

| | |
|-------------|----|
| EPOXY | 13 |
| TILE GROUT | 15 |
| GROUT ADMIX | 17 |

WATERPROOFING

| | |
|-------------------|----|
| LEGABOND SBR | 19 |
| LEGACEM TOUGH AW+ | 21 |
| TILE CLEANER | 23 |

ACCESSORIES

| | |
|-------------------|----|
| TILE SPACER | 25 |
| TROWEL | 25 |
| TILE LEVELING KIT | 25 |

TILE ADHESIVE

TRI

For internal floor applications

Packing 20 kg
Available in Grey color



PRODUCT DETAILS

Legado Tri is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult Legado Chemicals regarding use of a higher performance adhesive for applications in difficult and demanding situations.

APPLICATION AREAS

Adhesive for all ceramic tiles on Wall - Porcelain and Vitrified tiles up to 600x1200mm on floor

COVERAGE

Approximately 30 to 35 Sq.Ft./20kg @3mm thickness when using a thin trowel

| Parameters | Apperance | Pot Life | Open Time | Tensile Adhesion (28 days) | Shear Adhesion (28 days) | IS 15477:2019 | EN 12004 |
|----------------|-------------|-----------|-----------|----------------------------|--------------------------|---------------|----------|
| Specifications | Grey Powder | >60 mins. | >20 mins. | 0.50 N/mm ² | 1.00 N/mm ² | Type - 1 | CI T |

TILE ADHESIVE

TETRA

For internal wall & floor applications

Packing 20 kg
Available in Grey color



PRODUCT DETAILS

Legado Tetra is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult Legado Chemicals regarding use of a higher performance adhesive for applications in difficult and demanding situations.

APPLICATION AREAS

Adhesive great to use for applying in interior application up to 12 feet ceramic porcelain and vitrified tiles in wall up to 600x1200mm and on floor up to 800x1600mm.

COVERAGE

Approximately 30 to 35 Sq.Ft./20kg @3mm thickness when using a thin trowel

| Parameters | Apperance | Pot Life | Open Time | Tensile Adhesion (28 days) | Shear Adhesion (28 days) | IS 15477:2019 | EN 12004 |
|----------------|-------------|-----------|-----------|----------------------------|--------------------------|---------------|----------|
| Specifications | Grey Powder | >60 mins. | >20 mins. | 1.00 N/mm ² | 1.25 N/mm ² | Type - 1 | C2 T |

TILE ADHESIVE

PENTA

For internal & external wall & floor applications

Packing 20 kg
Available in Grey & White color



PRODUCT DETAILS

Legado Penta is a cement-based adhesive for wall and floor tiles. Suitable for fixing tiles and natural stones in interior and exterior situations which includes swimming pools. This is ideal for fixing tile on tile.

APPLICATION AREAS

Adhesive best suitable for vitrified tiles applications on wall up to 20 feet and floor indoor and outdoor uses in vitrified sizes up to 600x1200mm, 800x1600mm, 1200x1200mm, 1200x1800mm and granite window and flooring

COVERAGE

Approximately 30 to 35 Sq.Ft./20kg @3mm thickness when using a thin trowel

| Parameters | Apperance | Pot Life | Open Time | Tensile Adhesion (28 days) | Shear Adhesion (28 days) | IS 15477:2019 | EN 12004 |
|----------------|-------------------|-----------|-----------|----------------------------|--------------------------|---------------|----------|
| Specifications | Grey/White Powder | >60 mins. | >30 mins. | Dry 895 N Wet 669 N | 15.98 KN | Type - 2 | C2 TE |

TILE ADHESIVE

HEXA

For internal & external wall & floor applications

Packing 20 kg
Available in Grey & White color



PRODUCT DETAILS

Legado Hexa is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive specially formulated for fixing mosaic tiles ceramic, glass mosaic etc. It is also suitable for fixing ceramic, vitrified wall & floor tiles, metal or glass tiles, marble, granite, quartz stone, terrazzo and other natural stone in interior and exterior locations which includes use in swimming pools. This is ideal for fixing tile on tile.

APPLICATION AREAS

Adhesive best for all kind of heavy duty large tiles up to 35 Feet and size up to 1200x1800mm, 1600x3200m, 800x2400mmx15mm, 800x3000x15mm in Italian Marbles, Granite, Natural Stone, Swimming Pool and Compost Marble

COVERAGE

Approximately 30 to 35 Sq.Ft./20kg @3mm thickness when using a thin trowel

| Parameters | Apperance | Pot Life | Open Time | Tensile Adhesion (28 days) | Shear Adhesion (28 days) | IS 15477:2019 | EN 12004 |
|----------------|-------------------|-----------|-----------|----------------------------|--------------------------|---------------|----------|
| Specifications | Grey/White Powder | 3-4 Hours | 60 mins. | Dry 903 N Wet 684 N | 16.12 KN | Type - 3 | C2 TE S1 |

GROUT

EPOXY

Stain free grout for floor & wall tiles

Packing 1 kg & 5 kg



Easy to clean and Water wipable

PRODUCT DETAILS

Legado Epoxy is a hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition.

TECHNICAL SPECIFICATION

| Joint Width | Pot Life @27+-2C° | Cure @27+-2C° | Temperature Resistance | Water Absorption | Specific Gravity |
|--------------|-------------------|---------------|--|--------------------------------|------------------|
| 2-20mm | 45 minutes | 48 hours | Prolonged - 30C° to 150C° Intermittent | Nil(1) | 1.75 |
| | | | | Tensile Adhesion (14 days air) | |
| | | | | Dry condition | Wet condition |
| Epoxy Grout | | | | >4.5kn | >3.6kn |
| BS 5980:1980 | | | | 0.95 | 0.56 |
| (2) | | | | | |

PACKING SUPER SPARKLE

| Kit | Filler | Resin | Hardener |
|-----|---------|---------|----------|
| 5kg | 3.350kg | 1.100kg | 0.550kg |
| 1kg | 0.670kg | 0.220kg | 0.110kg |

PACKING MARVEL & SPARKLE

| Kit | Filler | Resin | Hardener |
|-----|---------|---------|----------|
| 5kg | 3.500kg | 1.000kg | 0.500kg |
| 1kg | 0.700kg | 0.200kg | 0.100kg |

| TILE SIZE | JOINT WIDTH | | | | | | |
|--------------|-------------|-----|-----|-----|-----|------|------|
| | 2mm | 3mm | 4mm | 6mm | 8mm | 10mm | 12mm |
| 100x100x3mm | 52 | 35 | 26 | 18 | 13 | 11 | 9 |
| 150x160x4mm | 58 | 39 | 29 | 20 | 15 | 12 | 10 |
| 200x150x5mm | 52 | 35 | 27 | 18 | 13 | 11 | 9 |
| 150x300x6mm | 62 | 41 | 31 | 20 | 16 | 13 | 11 |
| 300x300x6mm | 78 | 52 | 39 | 26 | 20 | 16 | 13 |
| 450x300x7mm | 81 | 54 | 40 | 27 | 20 | 16 | 13 |
| 600x450x8mm | 101 | 67 | 50 | 34 | 25 | 20 | 17 |
| 600x600x8mm | 118 | 78 | 59 | 39 | 29 | 23 | 19 |
| 600x900x11mm | 103 | 68 | 51 | 34 | 25 | 20 | 17 |
| 900x900x12mm | 118 | 78 | 59 | 39 | 29 | 23 | 19 |

GROUT

TILE GROUT

One pack water resistant tile grout

Packing 1 kg




PRODUCT DETAILS

Legado Tile Grout is a high quality fine, polymer modified, water-resistant, cement - based powder grout designed for grouting glaze wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles, etc. (Note: where chemical resistance is hygienic and sterile, it is important use Epoxy Grout)

SHELF LIFE & STORAGE

Shelf life is 24 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COLORS

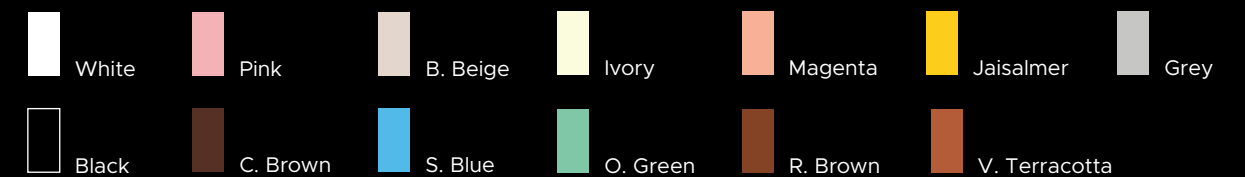

GROUT

GROUT ADMIX

For better strength of grout

Packing 200 ml



PRODUCT DETAILS

Legado Grout Admix is specially designed Latex Admix to be used with Sanded & Unsanded Grout.

APPLICATIONS

It improves the performance of Portland cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations.

BENEFITS

- Colour-fastness
- Flexibility
- Compressive strength
- Shock and chemical resistant
- Reduces water absorption
- Easy to clean

COVERAGE

Varies as per application.

WATERPROOFING

LEGABOND SBR

For waterproofing & repairs

Packing 200 gm, 1 kg, 5 kg & 20 kg



PRODUCT DETAILS

Legado Legabond SBR is a highly potent and versatile SBR based liquid for high performance applications in waterproofing and repairs.

TECHNICAL SPECIFICATION

- Type - Styrene Butadiene Polymer Liquid
- Color - White
- Specific Gravity - 1.02 + 0.02
- Storage Condition - Free from frost
- Solid Content - 44 + 1 %
- For best result - Use before 1 year if unopened Consumption - 1kg of Legado Legabond SBR will cover 70 - 80 sq. ft. area in 2 coats for a proportion mix 1:4:7 (Legado Legabond SBR : Water : Cement)

WATERPROOFING

LEGACEM

TOUGH AW+

Integral Liquid Water Proofing Compound For
Concrete & Plaster (Add Mixture)

Packing 200 ml, 1 ltr, 5 ltr & 20 ltr



PRODUCT DETAILS

Legado Lgacem Tough AW+ is a specially formulated integral liquid waterproofing compound composed of surface active plasticising agents, polymers & additives. It is used as an additive for cement concrete, mortar & plasters. It makes concrete cohesive and prevents segregation.

APPLICATIONS

Areas of Application Waterproofing of concrete and sand-cement mortars used in

- Basements
- Roof slabs and screeds
- Water tanks & water retaining structures
- External plastering
- Bathrooms and balconies
- Sumps and drains

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

DOSAGE

100 to 300 ml per 50 kg bag of cement.

METHOD OF APPLICATION

- Charge cement & aggregates to concrete mixer as per the mix design, mix in dry state for 1-2 minutes.
- Start addition of 75-80% mixing water & mix for 2-3 minutes.
- Legado Legabond Tough AW+ is added as per the recommended dosage into the remaining mixing / gauging water, then add to concrete mixer & mix for another 2 minutes.
- Place the concrete or apply plaster, as needed.
- Cure the applied mortar or concrete as per good construction practices.

TILE CLEANING

TILE CLEANER

Heavy duty tile cleaner

Packing 500 ml



PRODUCT DETAILS

Legado Tile Cleaner is a powerful, heavy duty, acid-based cleaner for ceramic & vitrified tile - wall & floor. The cleaner can be used as general purpose cleaner on other acid resistant surface.

AREAS OF APPLICATIONS

- Interior & Exterior
- Wall & Floor

BENEFITS

- Powerful formula
- Fast acting
- Easy to apply
- Removes cement film
- Remove efflorescence and most oxide stains.

NOTE - Do not use on surface that are not resistant to acid such as Natural stones, Terrazzo and CP Fittings.



TILE SPACER

Available in
2, 3, 4, 5, 6, 8 and 10mm.




TROWEL



TILE LEVELING KIT



sezito[®]
Tiles | Sanitary | Chemical

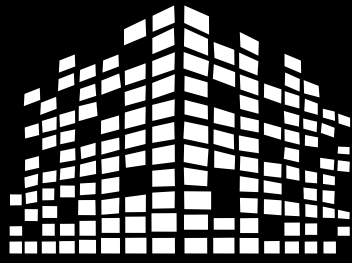

sezito®

Tiles | Sanitary | Chemical

Contact Number :- +91 93 93 93 39 28

CR INTERNATIONAL ,SHOP NO - 7 , BALAJI COMPLEX
B/H - VISHAL FURNITURE, 8A NATIONAL HIGHWAY,MORBI - 363642

info@sezito.com | www.sezito.com